



BUDVAR

windows more lasting than others

T-Slide in color: black smooth handle in color: black

**THE BEST EXIT
TO THE TERRACE**


**SLIDING
DOORS
PVC**

T-Slide

T-Slide in color: coal grey smooth;
handle color: titanium



Best close
– even very large and heavy
sash close smoothly and lightly



Invisible weld
– high durability and
aesthetics in one



Minimalistic design
– frame with a simple shape,
with only the handle visible



T-Slide in color: coal grey smooth; handle in color: titanium

Open up yourself to space

T-Slide is a modern sliding door, thanks to which the boundary between the interior of the house and the exit to the terrace blurs. The minimalist form and **very good insulation parameters** perfectly combine modern design and high comfort of use. They are the perfect complement to modern single-family houses and apartments with spacious terraces.

EUROPEAN
STANDARDS

CLASS S

TITANIUM
TECHNOLOGYNO
LEAD

ALU CLIP



T-Slide in color: white

Durability and energy efficiency
– multi-chamber sash and 182 mm deep frame as well as a multi-seal system, ensuring U_w of 0.74* and above.



Space without barriers

two variants of thresholds: 50 mm and 24 mm

In the case you choose a threshold with a height of 50 mm, it is possible to adjust its height to the floor level and achieve a completely smooth transition.

Best Close function

An additional door feature that slows down the sash before it closes, ensuring safe and quiet operation without slamming. The hidden mechanism allows the door to maintain its perfect appearance. Best Close can be used only when closing the sash (single-sided) or both when closing and opening the sash (double-sided).



The most durable terrace door with a frame depth of 182 mm

T-Slide doors are manufactured using modern Titanium Technology, in which we use full-grade PVC mixed with titanium oxide. They are characterized by high rigidity, high resistance to discoloration, and the harmful effects of sunlight. Strong PVC profiles make it possible to create extensive structures, reaching nearly 6.5 meters in width.



Full thermal comfort – U_w from 0.74 W/m²K

With T-Slide, you don't have to worry about escaping heat from your home. The multi-seal sealing system used in the door provides high insulation properties equal to PVC windows. As a result, despite the door size, it guarantees complete thermal comfort.

* U_w value obtained according to DIN EN ISO 10077-2 for a window with dimensions: 3000 mm x 2300 mm in opening scheme "A" with glazing $U_g = 0,5$ (42 mm 3-pane package with warm frame).



Smooth transition
with a threshold matching the floor level.



Minimalistic design

T-Slide is comprised of simple frames and a modern handle is the only visible element of the fitting.


- ▮ **wide range of colors**
from classic white to the most fashionable Earth colors - on one or both sides
- ▮ **invisible weld**
the corner weld is perfectly even, almost invisible, and more durable than other standard profile joints
- ▮ **profile colored in mass**
interior color of doors in a double-sided color that is visible upon opening matches the color of the veneer:
white, caramel, brown, anthracite
- ▮ **possibility to apply aluminium cladding**
with the aluminum cladding you can get a unique design of terrace doors
similar in appearance to the structure made of aluminum while
maintaining high thermal and acoustic parameters

T-SLIDE ALU
aluminium cover
threshold 24 mm




Design your T-Slide terrace door

1 Choose the type of construction

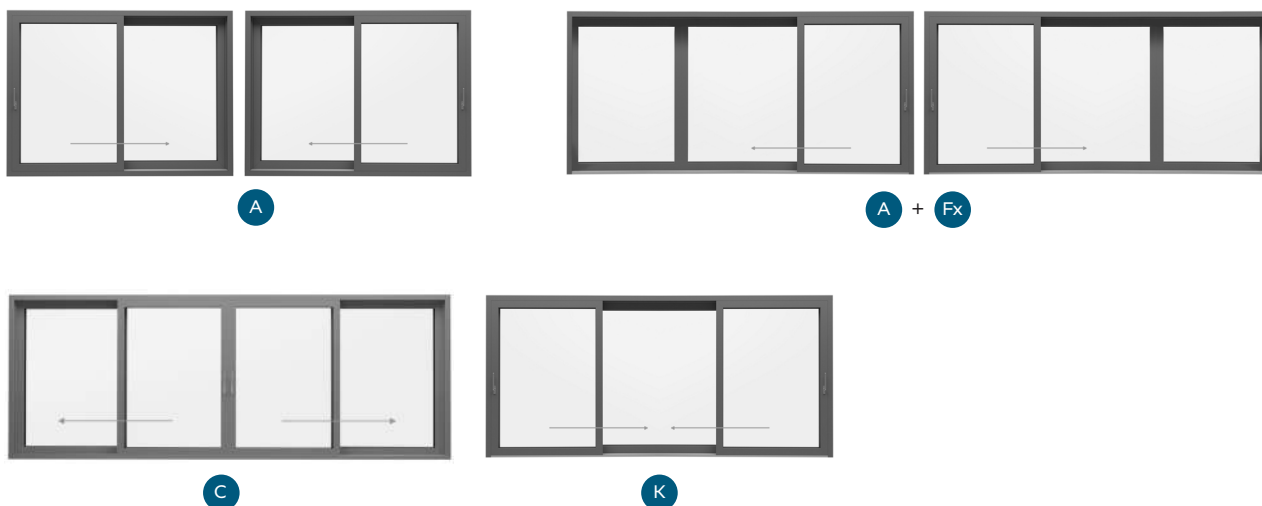


2 Select your color

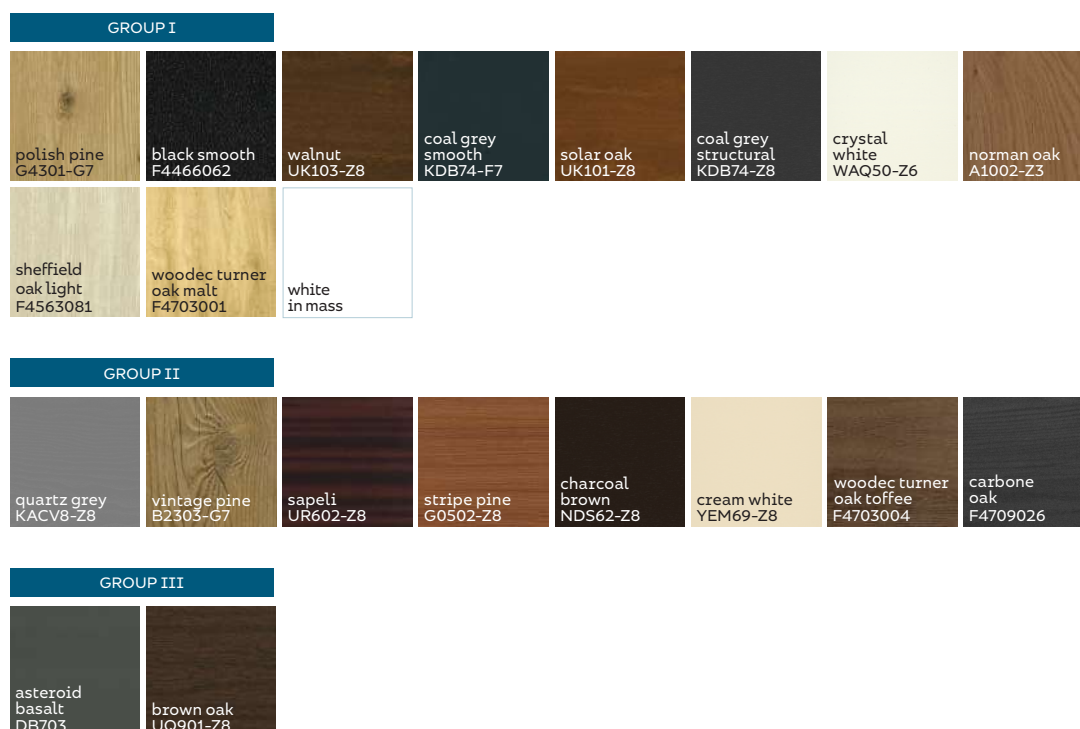


It is possible to choose colors not included in the offer on individual request.


3 Match the color and handle type

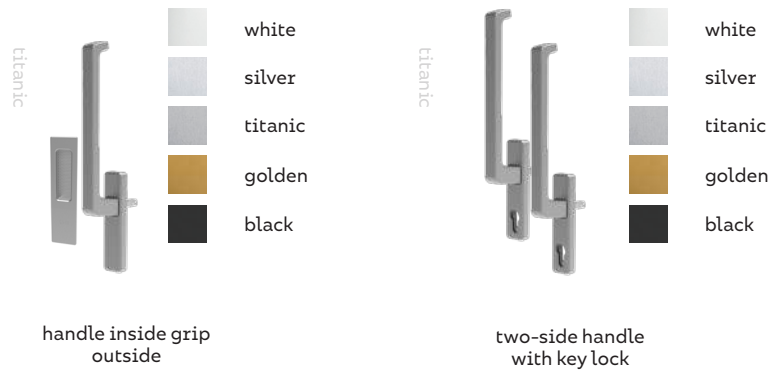

4 Choose the appropriate threshold

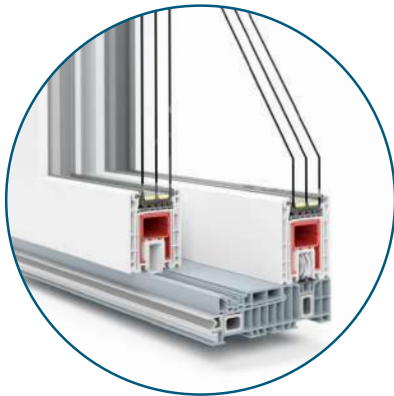

threshold 67 mm
enables alignment with
the floor level

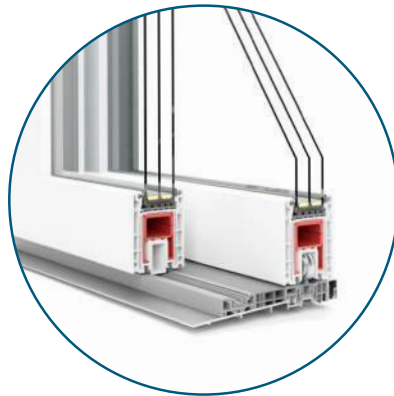

threshold 24 mm

5 Select a pane



sun protection



sound-absorbing



tempered



low-emission



laminated, anti-burglary


HKS




HKS in color: crystal white;
handle in color: silver



Invisible weld
– high durability and aesthetics
in one



Intuitive operation
– choose between HKS Auto
or HKS Manu



Aesthetic design
– covered rolling slides



Tilt or slide

HKS is a modern alternative to classic balcony solutions. The door moves parallel to its plane and allows the room to be ventilated by tilting. They can be based on one of 7 available Budvar systems so that they can be perfectly matched in design and insulating properties.



EUROPEAN
STANDARDS



CLASS S



TITANIUM
TECHNOLOGY



NO
LEAD



HKS in color: coal grey structural; handle in color: steel



Two variants of the door

Tilt and slide doors are available in two options so that they can be perfectly matched to the preferences of the homeowners.

▮ HKS Manu

An economic variant of the door that allows maximum use of home space. Before turning the handle to close the door (also from the tilt position), the door must be gently pressed against the frame.

▮ HKS Auto

It is equipped with an power-assisted tilt function. In order to tilt or close the door from the tilt position, you only need to turn the handle - no additional force is required. Doors with this option have a larger design, so they can reach up to 4 m in width.



The highest quality of doors manufactured in Titanium Technology

HKS terrace doors are manufactured using modern Titanium Technology. Due to the combination - at the stage of plastic processing - of full-grade PVC with an admixture of titanium oxide, we get a profile characterized by high rigidity, high resistance to discoloration, and harmful effects of sunlight.



Ecology

HKS terrace systems are certified to be free of admixtures of lead, cadmium, and compounds of other heavy metals. By choosing our doors, you can be sure that you are contributing to ensuring that these harmful substances do not poison the environment.



The design of doors matches the windows design

With a choice of 7 available systems, the design of the door can be perfectly matched to the design of the windows throughout the house.

wide range of colors

from classic white to the most fashionable Earth colors - on one or both sides

invisible weld

the corner weld is perfectly even, almost invisible, and more durable than other standard profile joints

profile colored in mass


interior color of doors in a double-sided color that is visible upon opening matches the color of the veneer:
white, caramel, brown, anthracite

Design your HKS terrace door

1 Select the system



T-Passive Energy



T-Passive Perfekt



T-Passive Perfekt
Forte



T-Passive Plus



T-Classic




T-Classic Forte





T-Comfort


2 Match the type of construction




A




C



K



G



3 Select the door variant

AUTO

with tilt
power-assisted
function

MANU

without tilt
power-assisted
function

4 Choose the right pane



sun protection



sound-absorbing



tempered



low-emission




laminated, anti-burglary

5 Match the color of handle




6 Select your color

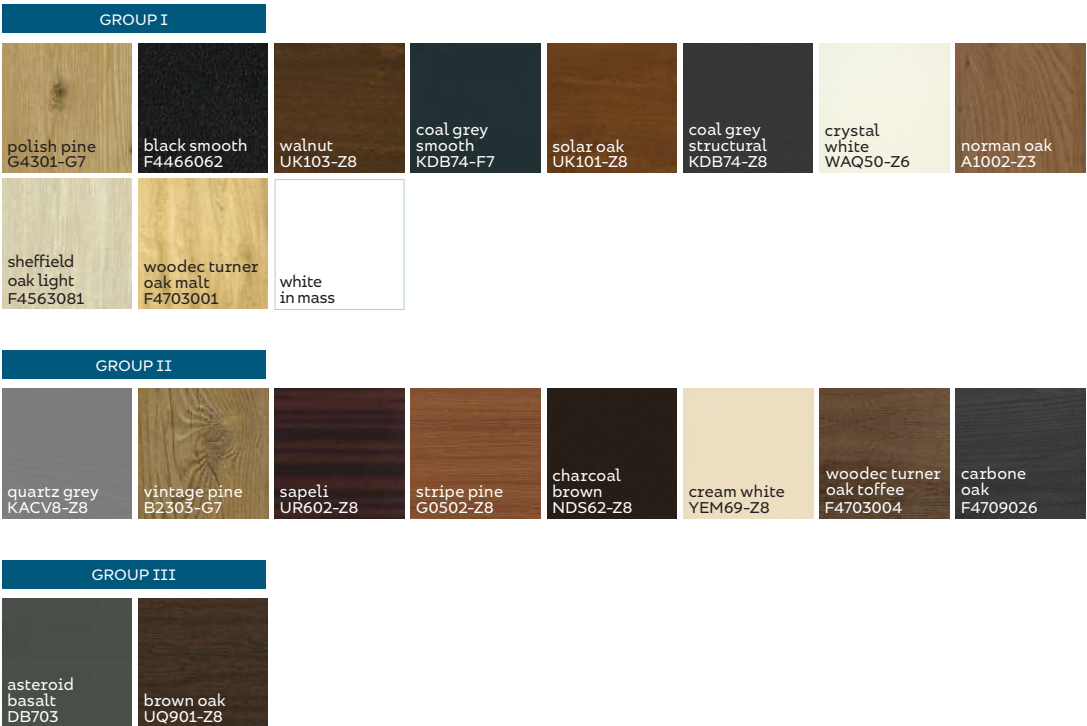

It is possible to choose colors not included in the offer on individual request.


PremiLine

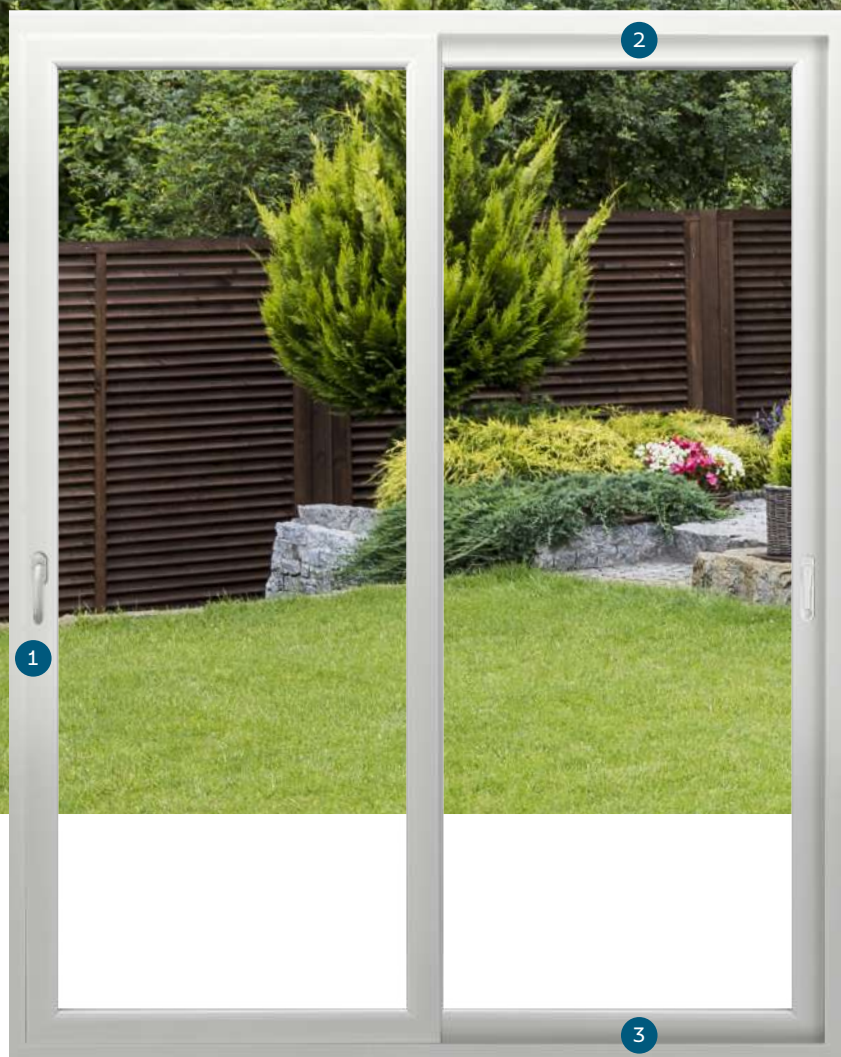


PremiLine - color: white



Comfortable operation
- opening and closing
is possible with the
window handle



Subtle design
- a narrow, window-like
design that
lends lightness



Tailored to needs
- choice of standard frame,
renovation frame, low threshold;
it is also possible to combine
PremiLine with windows




PremiLine - in color: white

Smooth transition to the terrace


Sliding patio doors are characterized by an incredibly slim design. As a result, the door operation is very comfortable, and a specially selected guide rail ensures quiet operation. In addition, the door has a brush seal, which makes it dedicated for use in countries with a light climate.

Design your patio door PremiLine


1 Choose the type of construction

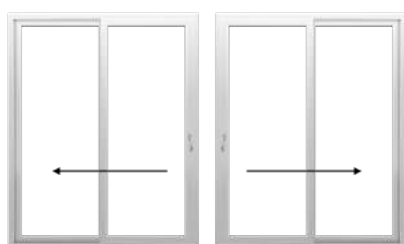

A

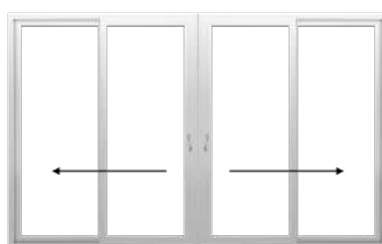

C



D

2 Choose the right pane



sunshade



sound-absorbing



tempered



low-emission



laminated, anti-burglary

3 Match the color and handle type

It is possible to use the option with a hidden handle or pull-handle.
Ask your dealer about available colors.

gold f4



white
silver f1
gold f4
steel f9
black

Standard handle



pull-handle



handle
hidden















pull-handle on both
sides with lock



recessed pull-handle

4 Select your color

 polish pine G4301-G7	 black smooth F4466062	 walnut UK103-Z8	 coal grey smooth KDB74-F7	 solar oak UK101-Z8	 coal grey structural KDB74-Z8	 crystal white WAQ50-Z6	 norman oak A1002-Z3
 quartz grey KACV8-Z8	 vintage pine B2303-G7	 sapeli UR602-Z8	 stripe pine G0502-Z8	 charcoal brown NDS62-Z8	 cream white YEM69-Z8	 woodec turner oak toffee F4703004	 carbone oak F4709026
 asteroid basalt DB703	 brown oak UQ901-Z8	 sheffield oak light F4563081	 woodec turner oak malt F4703001	 white in mass			

It is possible to choose colors outside the range, on individual request.



Remember about the proper installation!

Dear Customer, if you want our windows and doors to serve you for many years, maintaining their technical parameters and ensuring your safety, take care of their proper installation. The solution that will ensure you the highest insulation parameters is so-called warm installation.

Comparison of terrace doors

	T-Slide	HKS	PremiLine
	Opens up space	Perfect fit	Smooth transition to the terrace
Design	straight edges	depending on the selected profile option	straight edges
Opening system	lift-and-slide	tilt-and-slide	parallel-sliding
Folding height*	179 mm	depending on the selected profile option	137 mm
Number of gaskets	multi-gasket solution	depending on the selected profile option	n/a
Handle	one-sided (optional: two-sided)	one-sided	one-sided (optional: two-sided)
Lock	available in a two-sided handle option	-	available in a two-sided handle option
Threshold height	50 mm with adjustable height to floor level (optional: 24 mm)	depending on the selected profile option	PVC 61 mm (in option: ALU 20 mm)
Door frame type	standard	standard, renovation, monoblock and CH-frame	standard, renovation
Uw **	0.74 W/m²K	from 0.48 W/m²K (depending on the selected profile option)	1,2 W/m²K

* Folding height of standard frame.

** Uw value obtained according to DIN EN ISO 10077-2 for terrace doors of 3000 x 2300 mm with the option of standard double-chambered glass with a warm frame in opening scheme A. In the case of PremiLine doors, this value was obtained for single-chamber glazing.



Please see our window guide on
www.budvarcentrum.eu/category/window-tips/



and on our social media channels.



BUDVAR Centrum Sp. z o.o. | ul. Postępu 10, 02-676 Warszawa, Poland
office: ul. Przemysłowa 36, 98-220 Zduńska Wola, Poland
tel. +48 (43) 824 31 32 | e-mail: windows@budvarcentrum.eu

UP_ST_EN_09062023

